


POLYCAB MV CU BS 7835 8.7/15 KV

Medium Voltage Armoured Cable, 8.7/15 (17.5) KV AC

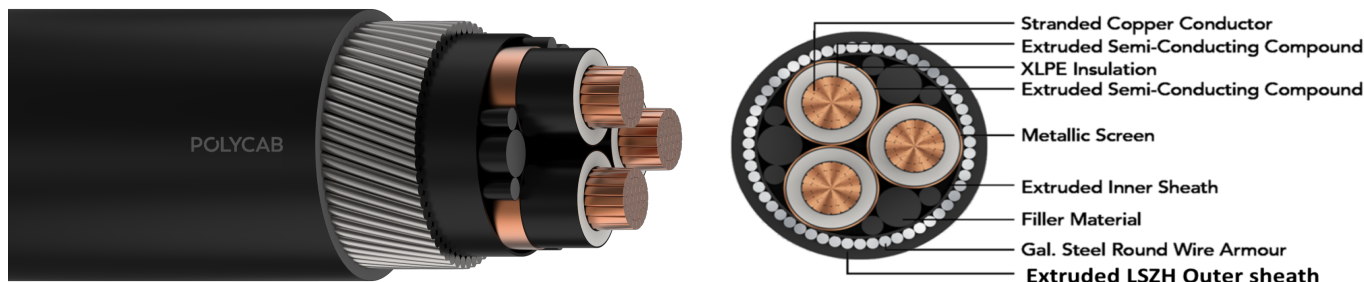

Images not to scale. Follow table for dimensions

APPLICATION

POLYCAB MV CU BS 7835 8.7/15 KV XLPE insulated with copper conductor single & multi core cable is designed for low smoke & low halogen evolution and this suitable to use for power networks, underground and in cable ducting.

CHARACTERISTICS

Voltage Rating

Nominal Voltage: 8.7/15 (17.5) kV

Operation Temperature

Max. operating temperature: +90°C

Max. Short Circuit Temperature: 250°C

Bending Radius:

Single core cable

Fixed Installation: 15 x Overall diameter

Three core cable

Fixed Installation: 12 x Overall diameter

CONSTRUCTION

- Conductor: Circular Compacted Copper conductor as per BS EN/IEC 60228, class 2
- Conductor Screen: Extruded Semi-conductive compound
- Insulation: XLPE as per BS 7655-1.3 or EPR as per BS 7655-1.2
- Non-Metallic Insulation Screen: Extruded Semi-conductive compound
- Metallic Insulation Screen: Copper tape screen
- Inner Covering: Extruded LSZH (Low Smoke Zero Halogen) compound
- Armour:
 - Single Core: Aluminium Round Wire Armoured (AWA)
 - Multi Core: Galvanised Steel Round Wire Armoured (SWA)
- Outer Sheath: Extruded LSZH compound as per BS 7655-6.1, Colour: Black

Test Voltage

35kV AC

Impulse Test Voltage

Peak 112kV AC

OUTSTANDING FEATURES

- Flame retardant
- High life
- UV resistant
- Oil resistant
- Low smoke emission

STANDARD FOLLOWS

BS EN/IEC 60228

BS 7655-1.3/1.2

BS 7655-6.1

BS 7835

COMPLIANCE

Conductor resistance BS EN/IEC 60228

Insulation resistance BS 7835

Flame Retardant test BS EN/IEC 60332-1-2

Partial Discharge test BS 7835

Smoke emission test BS EN/IEC 61034-2

POLYCAB MV CU BS 7835 8.7/15 KV
Medium Voltage Armoured Cable, 8.7/15 (17.5) KV AC



WEIGHT & DIMENSION DATA:

Product Code	No. of Cores	Nominal Cross sectional Area mm ²	Nominal Diameter			Weight (Approx.) Kg/Km
			Under armour mm	Over armour mm	Overall mm	
MVBS23CXAWLS001C070S	1	70	23.0	26.2	30.0	1600
MVBS23CXAWLS001C095S	1	95	24.8	28.0	32.0	1950
MVBS23CXAWLS001C120S	1	120	26.4	30.4	34.0	2250
MVBS23CXAWLS001C150S	1	150	28.5	32.5	37.0	2650
MVBS23CXAWLS001C185S	1	185	30.2	34.2	38.0	3050
MVBS23CXAWLS001C240S	1	240	32.6	36.6	41.0	3700
MVBS23CXAWLS001C300S	1	300	35.1	39.1	44.0	4450
MVBS23CXAWLS001C400S	1	400	38.3	43.3	48.0	5600
MVBS23CXAWLS001C500S	1	500	42.0	47.0	52.0	6850
MVBS23CXAWLS001C630S	1	630	45.4	50.4	56.0	8200
MVBS23CXAWLS001C800S	1	800	49.5	54.5	60.0	10000
MVBS23CXAWLS001C01KS	1	1000	54.2	59.2	65.0	12200
MVBS23CXSWLS003C070S	3	70	48.8	53.8	59.0	6700
MVBS23CXSWLS003C095S	3	95	52.6	57.6	64.0	7850
MVBS23CXSWLS003C120S	3	120	56.0	61.0	67.0	8950
MVBS23CXSWLS003C150S	3	150	59.7	64.7	71.0	10300
MVBS23CXSWLS003C185S	3	185	63.3	69.6	76.0	12450
MVBS23CXSWLS003C240S	3	240	69.1	75.4	82.0	14850
MVBS23CXSWLS003C300S	3	300	74.4	80.7	88.0	17350
MVBS23CXSWLS003C400S	3	400	81.4	87.7	96.0	21100
MVBS23CXSWLS003C500S	3	500	88.9	95.2	103.0	25300
MVBS23CXSWLS003C630S	3	630	96.1	102.4	111.0	29600

Electrical Characteristics:

No. of Cores	Nominal Cross sectional Area	Max. DC Resistance at 20°C	Max. AC Resistance at 90°C	Short circuit current rating	Capacitance (Approx.)	Inductance (Approx.)	Reactance (Approx.)
	mm ²	Ω/km	Ω/km	kA/s	µF/km	mH/km	Ω/km
1	70	0.268	0.342	10.02	0.22	0.40	0.13
1	95	0.193	0.247	13.59	0.24	0.38	0.12

POLYCAB MV CU BS 7835 8.7/15 KV

Medium Voltage Armoured Cable, 8.7/15 (17.5) KV AC

No. of Cores	Nominal Cross sectional Area mm ²	Max. DC Resistance at 20°C Ω/km	Max. AC Resistance at 90°C Ω/km	Short circuit current rating kA/s	Capacitance (Approx.) μF/km	Inductance (Approx.) mH/km	Reactance (Approx.) Ω/km
1	120	0.153	0.196	17.17	0.27	0.37	0.12
1	150	0.124	0.159	21.46	0.29	0.36	0.11
1	185	0.0991	0.128	26.47	0.32	0.35	0.11
1	240	0.0754	0.098	34.34	0.35	0.33	0.10
1	300	0.0601	0.080	42.93	0.39	0.32	0.10
1	400	0.047	0.064	57.23	0.44	0.32	0.10
1	500	0.0366	0.052	71.54	0.522	0.256	0.080
1	630	0.0283	0.042	90.14	0.574	0.247	0.078
1	800	0.0221	0.036	114.47	0.638	0.239	0.075
1	1000	0.0176	0.032	143.08	0.704	0.232	0.073
3	70	0.268	0.342	10.02	0.22	0.34	0.11
3	95	0.193	0.247	13.59	0.24	0.32	0.10
3	120	0.153	0.196	17.17	0.27	0.31	0.10
3	150	0.124	0.159	21.46	0.29	0.30	0.09
3	185	0.0991	0.128	26.47	0.32	0.29	0.09
3	240	0.0754	0.098	34.34	0.35	0.28	0.09
3	300	0.0601	0.080	42.93	0.39	0.27	0.09
3	400	0.047	0.064	57.23	0.44	0.26	0.08
3	500	0.0366	0.052	71.54	0.48	0.256	0.080
3	630	0.0283	0.042	90.14	0.53	0.250	0.079

Current Carrying Capacity :

No. of core	Nominal cross sectional area mm ²	Continuous Current Rating					
		Ground at 20°C		In single-way ducts		In air	
		Trefoil	Flat spaced	Trefoil ducts	Flat touching	Trefoil	Flat touching
		Amp.	Amp.	Amp.	Amp.	Amp.	Amp.
1	70	239	246	227	229	296	303

POLYCAB MV CU BS 7835 8.7/15 KV

Medium Voltage Armoured Cable, 8.7/15 (17.5) KV AC

No. of core	Nominal cross sectional area mm ²	Continuous Current Rating					
		Ground at 20°C		In single-way ducts		In air	
		Trefoil Amp.	Flat spaced Amp.	Trefoil ducts Amp.	Flat touching Amp.	Trefoil Amp.	Flat touching Amp.
1	95	285	293	271	274	361	369
1	120	323	332	308	311	417	426
1	150	361	366	343	347	473	481
1	185	406	410	387	391	543	550
1	240	469	470	447	453	641	647
1	300	526	524	504	510	735	739
1	400	590	572	564	571	845	837
1	500	604	551	525	454	911	837
1	630	660	588	571	482	1023	919
1	800	690	594	594	484	1103	960
1	1000	726	615	621	497	1191	1020

No. of core	Nominal cross sectional area mm ²	Continuous Current Rating		
		In ground at 20°C		In air
		Amp.	Amp.	Amp.
3	70	220	194	253
3	95	263	232	307
3	120	298	264	352
3	150	332	296	397
3	185	374	335	453
3	240	431	387	529
3	300	482	435	599
3	400	541	492	683
3	500	610	537	804

Maximum conductor temperature 90°C
 Ambient air temperature 30°C
 Ground temperature 20°C
 Depth of laying 0.8 m
 Thermal resistivity of soil 1.5 K.m/W
 Thermal resistivity of earthenware ducts 1.2 K.m/W

Document No.: 00345.Rev No.: 00 Date: 04-01-2024 / We reserve the rights to make technical changes.

POLYCAB MV CU BS 7835 8.7/15 KV
Medium Voltage Armoured Cable, 8.7/15 (17.5) KV AC



De-rating factor :

Current rating de-rating factors for other than 30°C ambient air temperature.

Air Temperature	20	25	35	40	45	50	55	60
De-rating factor	1.08	1.04	0.96	0.91	0.87	0.82	0.76	0.71

Current rating de-rating factors for other than 20°C ground temperature.

Ground Temperature	10	15	25	30	35	40	45	50
De-rating factor	1.07	1.04	0.96	0.93	0.89	0.85	0.8	0.76