


POLYCAB MV SC CU IS 7098-2, 3.3/3.3 KV(UE)

Medium Voltage Single Core Copper Armoured Cable, 3.3/3.3 KV (UE) AC

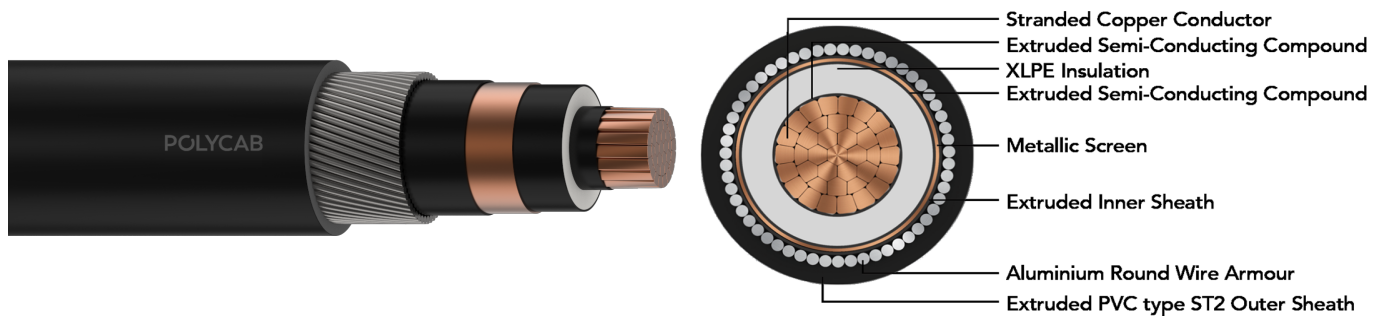

Images not to scale. Follow table for dimensions

APPLICATION

POLYCAB MV 3.3/3.3 KV(UE) XLPE insulated with copper conductor single core cable is suitable to use for power distribution for external and direct burial applications in power network system.

CHARACTERISTICS

Voltage Rating

Nominal Voltage: 3.3/3.3 KV (UE)

Operation Temperature

Max. operating temperature: +90°C

Max. Short Circuit Temperature: 250°C

Bending Radius:

Fixed Installation: 15D

D is overall diameter of cable

Test Voltage

10kV AC 50 Hz

OUTSTANDING FEATURES

- Flame retardant
- High life
- UV resistant

STANDARD FOLLOWS

IS 8130:2013

IS 5831:1984

IS 3975:1979

IS 7098-2:2011

COMPLIANCE

- Conductor resistance IS 8130
- Insulation resistance IS 7098-2
- Flammability test IEC 60332-1-2
- Partial Discharge test IS 7098-2

OUR ACCREDITATIONS



APPROVAL



NOTES

- Inner sheath available with FR/ FRLS
- Outer/ Inner available with FR/FRLS

Colour: Black

POLYCAB MV SC CU IS 7098-2, 3.3/3.3 KV(UE)

Medium Voltage Single Core Copper Armoured Cable, 3.3/3.3 KV (UE) AC

DIMENSIONS AND WEIGHTS:

Product Code	No. of Cores	Core Cross sectional Area	Nominal Diameter			Weight (Approx.)
			Under armour	Over armour	Overall	
2XWaY	No.	mm ²	mm	mm	mm	Kg/Km
MVIS14CXAWEY2001C025SA001S	1C	25	13.3	16.5	19.3	623
MVIS14CXAWEY2001C035SA001S	1C	35	14.5	17.7	20.5	745
MVIS14CXAWEY2001C050SA001S	1C	50	16.0	19.2	22.0	933
MVIS14CXAWEY2001C070SA001S	1C	70	17.6	20.8	23.6	1153
MVIS14CXAWEY2001C095SA001S	1C	95	19.4	22.6	25.4	1438
MVIS14CXAWEY2001C120SA001S	1C	120	21.0	24.2	27.0	1711
MVIS14CXAWEY2001C150SA001S	1C	150	22.7	25.9	29.0	2068
MVIS14CXAWEY2001C185SA001S	1C	185	24.4	27.6	30.7	2421
MVIS14CXAWEY2001C240SA001S	1C	240	27.0	31.0	34.2	3101
MVIS14CXAWEY2001C300SA001S	1C	300	29.5	33.5	36.6	3766
MVIS14CXAWEY2001C400SA001S	1C	400	32.9	36.9	40.4	4763
MVIS14CXAWEY2001C500SA001S	1C	500	36.8	40.8	44.6	5953
MVIS14CXAWEY2001C630SA001S	1C	630	40.6	45.6	49.7	7434
MVIS14CXAWEY2001C800SA001S	1C	800	45.3	50.3	54.7	9232
MVIS14CXAWEY2001C01KSA001S	1C	1000	50.2	55.2	59.9	11361

Product Code	No. of Cores	Core Cross sectional Area	Nominal Diameter			Weight (Approx.)
			Under armour	Over armour	Overall	
2XFaY	No.	mm ²	mm	mm	mm	Kg/Km
MVIS14CXAFY2001C025SA001S	1C	25	13.3	14.9	17.4	531
MVIS14CXAFY2001C035SA001S	1C	35	14.5	16.1	18.9	662
MVIS14CXAFY2001C050SA001S	1C	50	16.0	17.6	20.4	840
MVIS14CXAFY2001C070SA001S	1C	70	17.6	19.2	22.0	1051
MVIS14CXAFY2001C095SA001S	1C	95	19.4	21.0	23.8	1327
MVIS14CXAFY2001C120SA001S	1C	120	21.0	22.6	25.4	1591
MVIS14CXAFY2001C150SA001S	1C	150	22.7	24.3	27.1	1915

Document No.: 00050.Rev No.: 00 28-12-2023 / We reserve the rights to make technical changes.

POLYCAB MV SC CU IS 7098-2, 3.3/3.3 KV(UE) Medium Voltage Single Core Copper Armoured Cable, 3.3/3.3 KV (UE) AC

Product Code	No. of Cores	Core Cross sectional Area	Nominal Diameter			Weight (Approx.)
			Under armour	Over armour	Overall	
2XFaY	No.	mm ²	mm	mm	mm	Kg/Km
MVIS14CXAFY2001C185SA001S	1C	185	24.4	26.0	29.1	2287
MVIS14CXAFY2001C240SA001S	1C	240	27.0	28.6	31.8	2872
MVIS14CXAFY2001C300SA001S	1C	300	29.5	31.1	34.2	3516
MVIS14CXAFY2001C400SA001S	1C	400	32.9	34.5	37.7	4452
MVIS14CXAFY2001C500SA001S	1C	500	36.8	38.4	41.9	5605
MVIS14CXAFY2001C630SA001S	1C	630	40.6	42.2	45.9	6896
MVIS14CXAFY2001C800SA001S	1C	800	45.3	46.9	51.0	8647
MVIS14CXAFY2001C01KSA001S	1C	1000	50.2	51.8	56.2	10702

The above data is approximate & subject to manufacturing tolerance.

ELECTRICAL CHARACTERISTICS:

No. of Cores	Core Cross sectional Area	Max. DC Resistance at 20°C	Max. AC Resistance at 90°C	Approx. Capacitance	Approx. Inductance		Approx. Reactance	
					mH/km		Ω/km	
No.	mm ²	Ω/km	Ω/km	μF/km	2XFaY	2XWaY	2XFaY	2XWaY
1	25	0.727	0.932	0.22	0.40	0.42	0.13	0.13
1	35	0.524	0.672	0.25	0.38	0.40	0.12	0.13
1	50	0.387	0.496	0.29	0.35	0.37	0.11	0.12
1	70	0.268	0.344	0.33	0.34	0.35	0.11	0.11
1	95	0.193	0.248	0.38	0.32	0.34	0.10	0.11
1	120	0.153	0.197	0.41	0.31	0.32	0.10	0.10
1	150	0.124	0.159	0.46	0.30	0.31	0.09	0.10
1	185	0.0991	0.128	0.50	0.29	0.30	0.09	0.10
1	240	0.0754	0.098	0.56	0.28	0.30	0.09	0.09
1	300	0.0601	0.078	0.62	0.27	0.29	0.09	0.09
1	400	0.047	0.062	0.68	0.27	0.28	0.08	0.09
1	500	0.0366	0.049	0.72	0.26	0.28	0.08	0.09
1	630	0.0283	0.038	0.75	0.26	0.28	0.08	0.09

POLYCAB MV SC CU IS 7098-2, 3.3/3.3 KV(UE)

Medium Voltage Single Core Copper Armoured Cable, 3.3/3.3 KV (UE) AC

No. of Cores	Core Cross sectional Area	Max. DC Resistance at 20°C	Max. AC Resistance at 90°C	Approx. Capacitance	Approx. Inductance		Approx. Reactance	
No.	mm ²	Ω/km	Ω/km	μF/km	mH/km		Ω/km	
					2XFaY	2XWaY	2XFaY	2XWaY
1	800	0.0221	0.031	0.77	0.26	0.27	0.08	0.09
1	1000	0.0176	0.026	0.81	0.25	0.27	0.08	0.08

CURRENT CARRYING CAPACITY:

Nominal area of conductor	Buried direct in the ground		In single -way Ducts		In air	
	Trefoil	Flat touching	Trefoil ducts	Flat touching ducts	Trefoil	Flat Touching
Sqmm	A	A	A	A	A	A
25	127	130	113	111	148	151
35	151	155	135	132	179	183
50	178	181	158	154	214	218
70	216	220	192	187	267	271
95	256	260	227	220	323	327
120	290	292	257	247	374	376
150	323	323	285	272	422	422
185	362	359	319	302	484	481
240	411	398	361	333	565	550
300	456	435	400	363	641	615
400	508	474	443	393	734	690
500	559	509	486	420	828	761
630	611	543	529	446	929	834
800	638	549	549	447	1002	872
1000	672	569	575	460	1083	927

Air Ambient temperature: 40°C
Ground ambient temperature: 30°C
Conductor operating temperature: 90°C
The above table is in accordance with IS 3961(part 7):2016

POLYCAB MV SC CU IS 7098-2, 3.3/3.3 KV(UE) Medium Voltage Single Core Copper Armoured Cable, 3.3/3.3 KV (UE) AC

De-Rating Factor

Rating factor for variation in ambient air temperature for cable in free air

Ambient air Temperature	25°C	30°C	35°C	40°C	45°C	50°C	55°C	60°C
De-Rating Factor	1.14	1.10	1.05	1.00	0.95	0.89	0.84	0.77

Maximum conductor temperature 90°C

Rating factor for variation in ground temperature for direct buried cables.

Ground Temperature	15°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C
De-Rating Factor	1.12	1.08	1.04	1.00	0.96	0.91	0.87	0.82

Maximum conductor temperature 90°C

Rating factor for variation in ground temperature for cable in duct.

Ground Temperature	15°C	20°C	25°C	30°C	35°C	40°C	45°C	50°C
De-Rating Factor	1.12	1.08	1.04	1.00	0.96	0.91	0.87	0.82

Maximum conductor temperature 90°C